



MicroWedge Pole Adapter 12/15 Instructions

The EAW **MicroWedge Pole Adapter** allows the EAW MicroWedge 12 and EAW MicroWedge 15 to be supported by a 1-3/8" diameter pole or tripod stand.

WARNING: SUSPENDING LOUDSPEAKERS SHOULD BE DONE WITH EXTREME CAUTION AND BY A CERTIFIED PROFESSIONAL WHO IS QUALIFIED TO DETERMINE THE REQUIREMENTS FOR AND TO IMPLEMENT OVERHEAD RIGGING. FAILURE TO FOLLOW PROPER PRECAUTIONS MAY RESULT IN DAMAGE TO THE EQUIPMENT, INJURY OR DEATH.


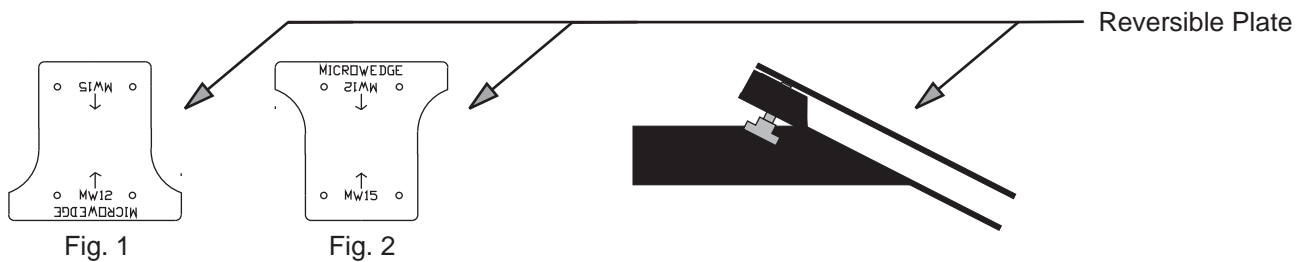


Fig. 3

Installation

- The **MicroWedge Pole Adapter** incorporates a reversible plate that allows either an EAW MicroWedge 12 or EAW MicroWedge 15 to be supported.
- To support a MicroWedge 12, attach the reversible plate such that the narrow side is upwards when mounted on the tripod and "MW 12" reads right side up. See Fig 1.
- To support a MicroWedge 15, attach the reversible plate such that the wide side is upwards when mounted on the tripod and "MW 15" reads right side up. See Fig 2.
- With the MicroWedge on the ground and the port facing upwards, loosen the thumb screws enough to slide the **MicroWedge Pole Adapter** into the port with the thumb screws outside the port. See Fig. 3.
- Tighten the two thumb screws by hand so the **MicroWedge Pole Adapter** is held firmly in place.
- NEVER attempt to lift a MicroWedge by the **MicroWedge Pole Adapter**.
- Be sure that the tripod stand or pole is rated to support a minimum of 70 pounds for a MicroWedge 12 and a minimum of 90 pounds for a MicroWedge 15.
- Two people gently lift the MicroWedge with the **MicroWedge Pole Adapter** attached over the 1-3/8" tripod stand pole or MicroSub pole and assure that the pole slides all the way up into the **MicroWedge Pole Adapter**.

Removal

- Two people gently lift the MicroWedge and **MicroWedge Pole Adapter** upward and off of the tripod stand or MicroSub pole.
- Set the MicroWedge on the ground with the port facing upwards and loosen the two thumb screws.
- Slide the MicroWedge Pole Adapter off of the MicroWedge.
- Re-tighten the two thumb screws so you don't lose them.